

SPEEDY DEPLOYMENT

MULTIPLE LIGHTING **DISTRIBUTION**





Single latch to release tripod

Deploy or fold in seconds.
















Ultra-long Endurance

Standard Mode Up To 20+ Hours (3xD24-100)

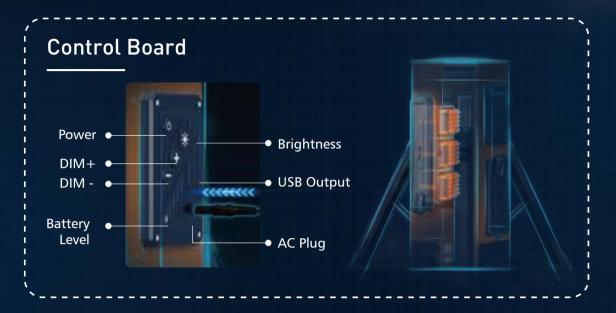

Application



Emergency



Infrastructure



Railway



Event



Maintenance



Mining



Sport




Construction



AC Powered Up To 17,000

Battery-powered Up To 10,000

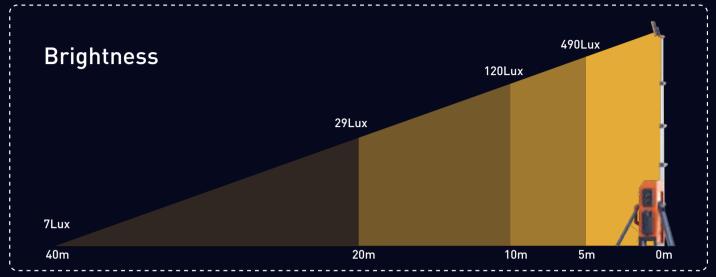

* 'Brightness' represents the center point illuminance value of the lighting direction

AC	0-17,000LM Stepless Dimmable					
Battery (4 Mode)	Turbo	10,000LM				
	Standard	6,300LM				
	Balanced	3,800LM				
	Eco	1,000LM				
				1		
		ه در پانس	أرحاد		N.D.	

Lighting Area 1100m²

One-person Operation

Transport, deploy, adjust lighting in seconds with one operator.



Optional Accessories

9 Bay Simultaneous Rapid Charger (TKC-9)

Carry 9 battery packs, charge them for off-grid light tower operation for up to a week.

Achieve I5000LM full brightness with the driver, or operate wirelessly using a battery and charger.

Cover all possibilities with a choice of Power Options.

Battery (D24 Series)

TL400 is a main light source that doubles as a USB charger for T2 headlamps, S3 flashlights, and mobile devices.

Fully equipped for any challenges in the dark!

Charger~(MC-2)

T2 Head Light

Driver (X1-75-56BH)

Charger (MC-I)

S3 Flash Light

Specifications


TL-400


Hight	64.5cm~220cm		
Weight	10Kg (Fitting only)		
Power Supply	Battery / AC 100-277V		
Lumens	0 - 17,000Lm		
Run Times	>20 hours (Standard mode, D24-100)		
IP Grade	IP65		
Output(USB)	5V 2A (2 Dock)		
Battery System	D24-100		


Battery (D24-100)

Rated Power	98Wh
Rated Voltage	24.5V
Rated Capacity	4.0Ah
Working Temperture	-10~50℃
Working Humidity	1~98%

Size (mm)





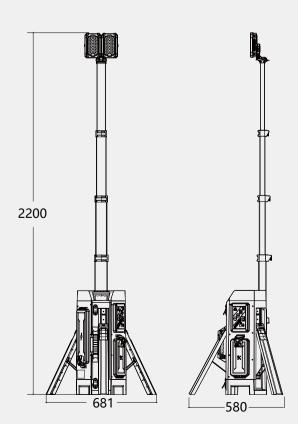

Package

Size of Carton	Gross Weight of Carton	PCS/Carton
730x390x410mm	13.3kg±5%	1
	L	
	K-market A	
	5	ower